UPPER ROOF LAYOUT

Trusstech SA Pty Ltd
ABN: 401 318 22 140 16 High Street Dry Creek SA 5094 Ph: 08 8260 6006

MULTINAIL

OAKRIDGE
BUILDING SERVICES
PH : 83837222
FAX : 83837225

TRUSS DETAILS

TRUSSES & BRACING TO BE INSTALLED, ERECTED & BRACED IN ACCORDANCE WITH AS4440-2004
STABILIZER/HANGER @ 1800 CTS MAX UNO
BEARING WIDTH FOR TRUSSES 90mm UNO
TS = TRUNCATED STANDARD
TG = TRUNCATED GIRDER
S/B = SPEED BRACE
S/V = SCOTCH VALLEY

NOTE: TRUSSES & JOISTS TO BE POSITIONED DIRECTLY OVER STUDS

UNLESS SHOWN OTHERWISE ON LAYOUT,
NO SPECIAL LOADS HAVE BEEN ALLOWED.
EG - A/C UNITS, SOLAR PANELS ETC.

MINIMUM BEARING WIDTH FOR TIMBER TRUSSES SHOULD BE 70MM. FOR BEARING WIDTH LESS THAN 70MM, CONFIRMATION FROM THE TRUSS ENGINEER SHOULD BE SOUGHT.

TRUNCATED GIRDER HAS BEEN DESIGNED TO CARRY CONVENTIONAL HIP END TIMBER (RAFTERS, HANGING BEAMS & HIPS)
X = INTERNAL SUPPORT / CANTILEVER POINT

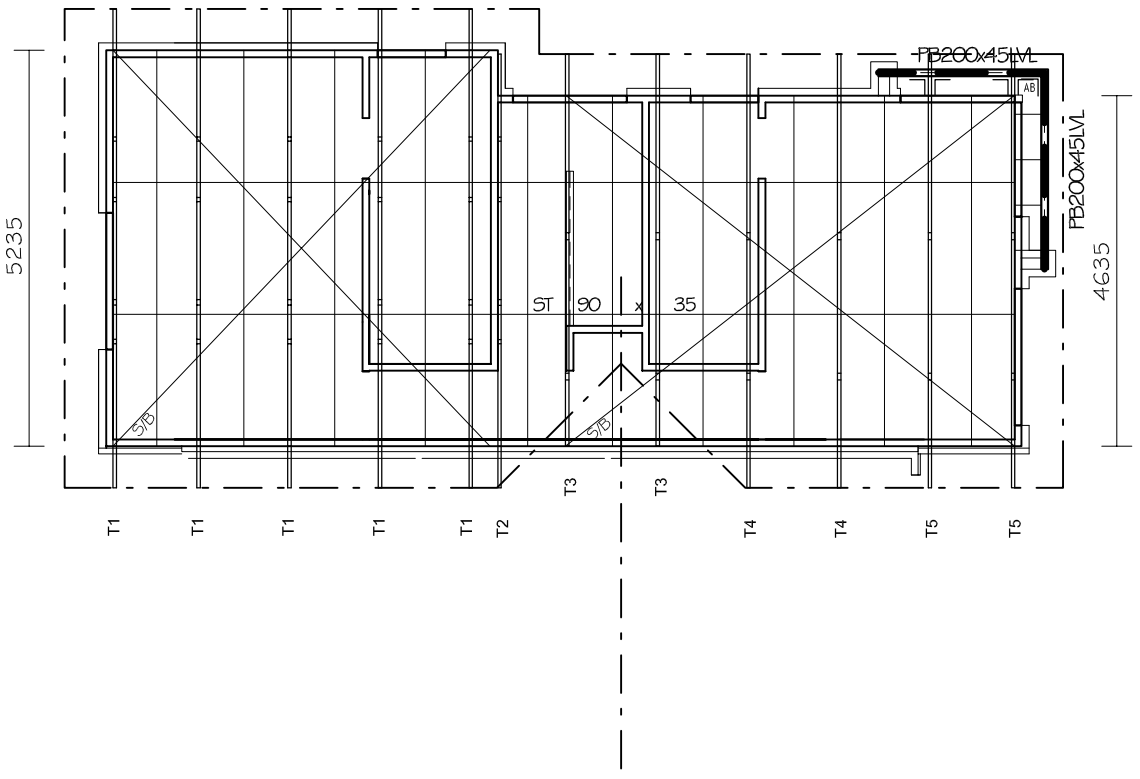

PURLINS : 90x45 MGP10 @ 900mm cts generally with maximum endspans of 900mm
* JOINTS TO BE STAGGERED

CONVENTIONAL TIMBER DETAILS

CEILING JOISTS 90x35 MGP10 @ 600 CTS UNO
HANGING BEAMS @ 1800 MAX CTS
RAFTERS 120x35 MGP10 @ 600 CTS FOR TILES & 1200 CTS FOR IRON UNO
HIPS LOWER 190x35 MGP10 UNO
HIPS UPPER 120x35 MGP10 UNO
VT= VALLEY TRIM 120x35 MGP10
RP= RAKING PLATE 190 x 45 MPG10
RIDGE 140x35 MGP10 UNO
UNDERPURLINS 130x63 LVL
COLLAR TIES 90x35 M10 @ 1200 cts < 4.2m
120x35 M10 @ 1200 cts > 4.2m
ALL MATERIALS ALLOWED AS5 PER AS 1684.2-2010
HANGERS:
H1 = 120x35 MGP10
H2 = 140x35 MGP10
H3 = 190x35 MGP10
H4 = 190x45 MGP10

DENOTES STRUTTING POINT
FAN STRUT POINT 90x70 WITH 2/90x35 SPREADERS

SPEED BRACE FIXING DETAILS AT APEX

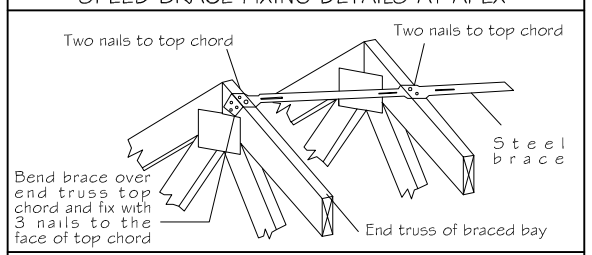

SPEED BRACE SPLICING DETAILS

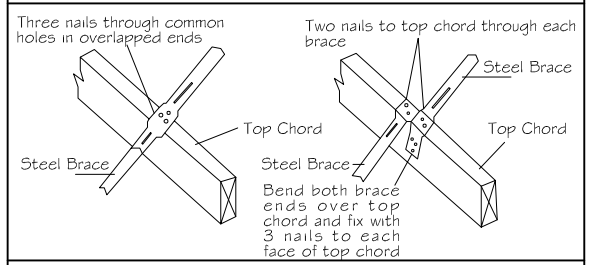

SPEED BRACE FIXING DETAILS AT HEEL

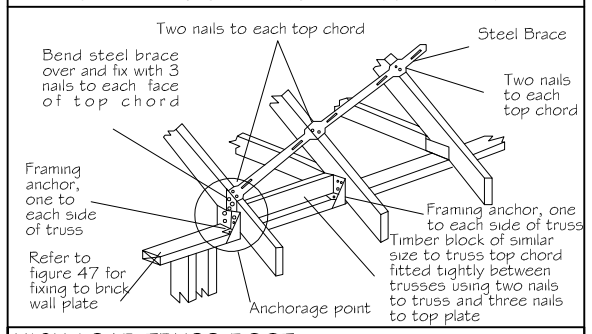

HIGH-LOAD TRUSS BOOT

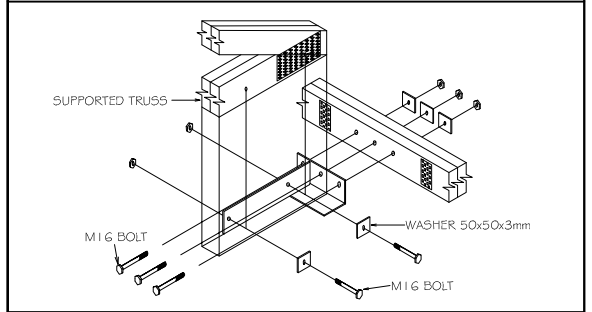

TRUSS BOOT

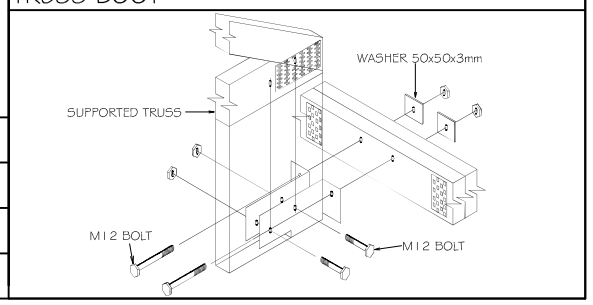

DWELLING 5

Timber: H0 Dry Swd (can include KD Hwd)	Roofing: Metal Sheet	Wind / Ext / Int: N1 / 0.9 / 0.2	Customer: D'ANDREA Reference: Dwelling 5	SHEET 4/5
Pitch: 10.0 Deg	TC fix/rest: Metal @ 1200c / 1200	Structural Fascia Type: No As per AS 1684.1	Site Address: 541 ANZAC HWY, GLENELG EAST	Date: 25/05/2018
Overhang: 600 mm	Ceiling: Plaster 10mm Supa Span	Ground Snow Load: Sg = 0 kPa	Detailer: Matt Opie Signed:	Scale: 1:100
Spacing: 1200mm	BC fix/rest: Direct fix @ 600c / 600	Structure Type: House		Job No: TT09731

S:\OAKRIDGE TAKEOFFS\D'ANDREA\541 ANZAC HWY\DS\DS 541 ANZAC.dwg